











HINGED PATIO DOORS – INSWING







Table of Hinged Inswing Patio Door Sizes







Door Dimension	2'-0 1/2" (620)	4'-0" (1219)	4'-0" (1219)
Minimum Rough Opening	2'-1" (634)	4'-1" (1242)	4'-1" (1242)
Unobstructed Glass (single panel only)	13 1/4" (336)	13 1/4" (336)	13 1/4" (336)
4 heights	 1 ISPD2168S 2 ISPD21611S 3 ISPD2176S 4 ISPD2180S	 1 ISPD4168APLR 2 ISPD41611APLR 3 ISPD4176APLR 4 ISPD4180APLR	 1 ISPD4168PALR 2 ISPD41611PALR 3 ISPD4176PALR 4 ISPD4180PALR

Stationary (**S**) doors can be used as an individual unit or as a sidelight.

For more information on divided light visit andersenwindows.com/grilles.



Door Dimension	2'-6 1/8" (765)	2'-6 1/8" (765)	2'-6 1/8" (765)	4'-11 1/4" (1504)	4'-11 1/4" (1504)	4'-11 1/4" (1504)	4'-11 1/4" (1504)
Minimum Rough Opening	2'-7" (787)	2'-7" (787)	2'-7" (787)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)	5'-0" (1524)
Unobstructed Glass (single panel only)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)	18 7/8" (479)
4 heights	 1 ISPD2768S 2 ISPD27611S 3 ISPD2776S 4 ISPD2780S	 1 ISPD2768AR 2 ISPD27611AR 3 ISPD2776AR 4 ISPD2780AR	 1 ISPD2768AL 2 ISPD27611AL 3 ISPD2776AL 4 ISPD2780AL	 1 ISPD5068ASR 2 ISPD50611ASR 3 ISPD5076ASR 4 ISPD5080ASR	 1 ISPD5068SAL 2 ISPD50611SAL 3 ISPD5076SAL 4 ISPD5080SAL	 1 ISPD5068APLR 2 ISPD50611APLR 3 ISPD5076APLR 4 ISPD5080APLR	 1 ISPD5068PALR 2 ISPD50611PALR 3 ISPD5076PALR 4 ISPD5080PALR

Door Dimension	2'-8 1/8" (816)	2'-8 1/8" (816)	2'-8 1/8" (816)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)	5'-3 1/4" (1607)
Minimum Rough Opening	2'-9" (838)	2'-9" (838)	2'-9" (838)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)	5'-4" (1626)
Unobstructed Glass (single panel only)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)	20 7/8" (530)
4 heights	 1 ISPD2968S 2 ISPD29611S 3 ISPD2976S 4 ISPD2980S	 1 ISPD2968AR 2 ISPD29611AR 3 ISPD2976AR 4 ISPD2980AR	 1 ISPD2968AL 2 ISPD29611AL 3 ISPD2976AL 4 ISPD2980AL	 1 ISPD5468ASR 2 ISPD54611ASR 3 ISPD5476ASR 4 ISPD5480ASR	 1 ISPD5468SAL 2 ISPD54611SAL 3 ISPD5476SAL 4 ISPD5480SAL	 1 ISPD5468APLR 2 ISPD54611APLR 3 ISPD5476APLR 4 ISPD5480APLR	 1 ISPD5468PALR 2 ISPD54611PALR 3 ISPD5476PALR 4 ISPD5480PALR

Door Dimension	3'-0 1/8" (918)	3'-0 1/8" (918)	3'-0 1/8" (918)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)	5'-11 1/4" (1810)
Minimum Rough Opening	3'-1" (940)	3'-1" (940)	3'-1" (940)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)	6'-0" (1829)
Unobstructed Glass (single panel only)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)	24 7/8" (632)
4 heights	 1 ISPD3168S 2 ISPD31611S 3 ISPD3176S 4 ISPD3180S	 1 ISPD3168AR 2 ISPD31611AR 3 ISPD3176AR 4 ISPD3180AR	 1 ISPD3168AL 2 ISPD31611AL 3 ISPD3176AL 4 ISPD3180AL	 1 ISPD6068ASR 2 ISPD60611ASR 3 ISPD6076ASR 4 ISPD6080ASR	 1 ISPD6068SAL 2 ISPD60611SAL 3 ISPD6076SAL 4 ISPD6080SAL	 1 ISPD6068APLR 2 ISPD60611APLR 3 ISPD6076APLR 4 ISPD6080APLR	 1 ISPD6068PALR 2 ISPD60611PALR 3 ISPD6076PALR 4 ISPD6080PALR


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- Colonial divided light pattern shown for 6'-8" and 6'-11" doors. Visit andersenwindows.com/grilles for more information and available patterns.

Four Patio Door Heights


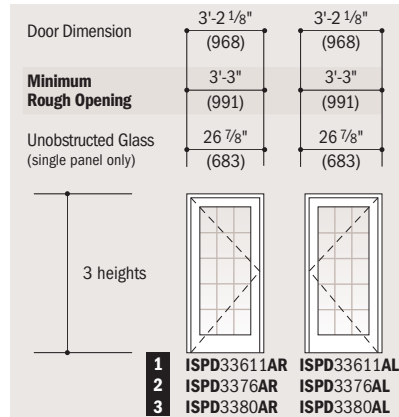
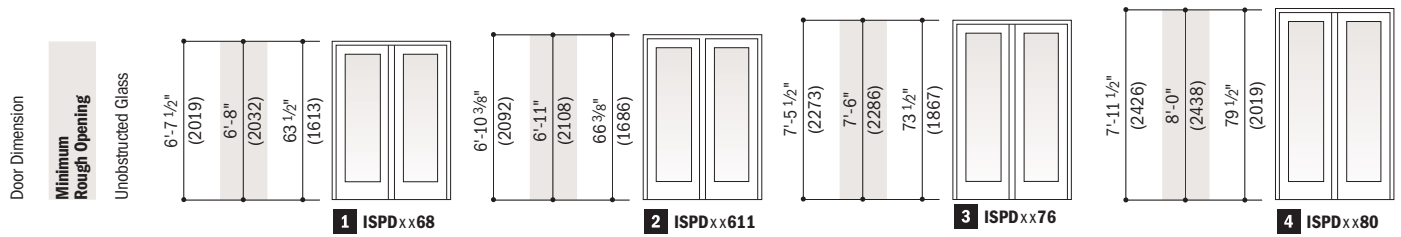


Accessibility Width Patio Door Also Available

For easier access, this single panel door offers a 32" clear opening when the panel is open 90°, a 1/2" threshold, and a bottom rail height of 10.263". This door meets the requirements of ICC/ANSI A-117.1-2003 and ADAAG guidelines. It also meets Federal Fair Housing Act guidelines. This door has a limited water rating (LW) due to the low threshold sill.



Order Designation Description

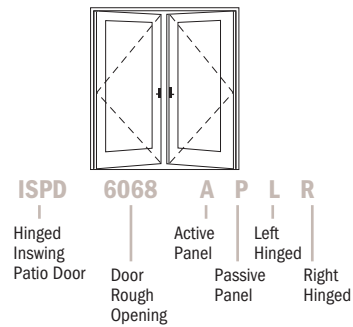

- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- Colonial divided light pattern shown for 6'-11" accessibility width door. Visit andersenwindows.com/grilles for more information and available patterns.