

200 SERIES NARROLINE® GLIDING PATIO DOORS

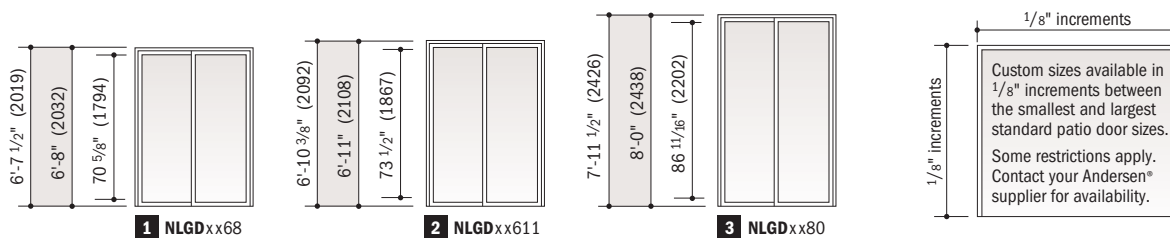







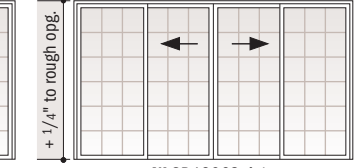


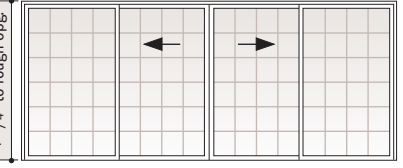


Table of Basic Unit Sizes Scale 1/8" = 1'-0" (1:96)

Exterior views shown. Arrow indicates direction of panel.

Unit Dimension	2'-8"	4'-11 1/4"	4'-11 1/4"	9'-9"
	(813)	(1504)	(1504)	(2972)
Minimum Rough Opening	2'-8 3/4"	5'-0"	5'-0"	9'-9 3/4"
	(832)	(1524)	(1524)	(2991)
Unobstructed Glass	24 1/2"	24 1/2" 24 1/2"	24 1/2" 24 1/2"	24 1/2" 24 1/2" 24 1/2" 24 1/2"
	(622)	(622) (622)	(622) (622)	(622) (622) (622) (622)
Available in 3 heights				
	1 NLGD2968S 2 NLGD29611S 3 NLGD2980S	NLGD5068L NLGD50611L NLGD5080L	NLGD5068R NLGD50611R NLGD5080R	NLGD10068-4 * NLGD100611-4 * NLGD10080-4 *
Unit Dimension	3'-2"	5'-11 1/4"	5'-11 1/4"	11'-9"
	(965)	(1810)	(1810)	(3581)
Minimum Rough Opening	3'-2 3/4"	6'-0"	6'-0"	11'-9 3/4"
	(984)	(1829)	(1829)	(3600)
Unobstructed Glass	30 1/2"	30 1/2" 30 1/2"	30 1/2" 30 1/2"	30 1/2" 30 1/2" 30 1/2" 30 1/2"
	(775)	(775) (775)	(775) (775)	(775) (775) (775) (775)
Available in 3 heights				
	1 NLGD3368S 2 NLGD33611S 3 NLGD3380S	NLGD6068L NLGD60611L NLGD6080L	NLGD6068R NLGD60611R NLGD6080R	NLGD12068-4 * NLGD120611-4 * NLGD12080-4 *
Unit Dimension	4'-2"	7'-11 1/4"	7'-11 1/4"	15'-9"
	(1270)	(2419)	(2419)	(4801)
Minimum Rough Opening	4'-2 3/4"	8'-0"	8'-0"	15'-9 3/4"
	(1289)	(2434)	(2434)	(4820)
Unobstructed Glass	42 1/2"	42 1/2" 42 1/2"	42 1/2" 42 1/2"	42 1/2" 42 1/2" 42 1/2" 42 1/2"
	(1080)	(1080) (1080)	(1080) (1080)	(1080) (1080) (1080) (1080)
Available in 3 heights				
	1 NLGD4368S 2 NLGD43611S 3 NLGD4380S	NLGD8068L NLGD80611L NLGD8080L	NLGD8068R NLGD80611R NLGD8080R	NLGD16068-4 * NLGD160611-4 * NLGD16080-4 *

* Four-panel doors open without obstruction.

• **Rough opening dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**

• "Unit Dimension" always refers to outside frame to frame dimension.

• Dimensions in parentheses are in millimeters.

• "S" designates a stationary unit which can be used as an individual unit or a sidelight.

• Combinations of door units joined together may require horizontal or vertical reinforcement. This reinforcement should be specified by a professional engineer.

• When ordering, be sure to specify color desired: White, Sandtone or Terratone®