

ANDERSEN™ HIGH-PERFORMANCE FLASHING TAPE FOR WINDOW & DOOR INSTALLATION

KEY ADVANTAGES



Applies from 0°F to 140°F



UV resistant up to 12 months



Quick and easy installation



Asphalt and solvent free




High tack adhesion



PRODUCT FEATURES

- Adhesion to Andersen® product substrates and common building materials
- Asphalt and solvent free means product will not liquefy, bleed or melt in extreme summer temperatures
- Split release liner for easy and accurate application
- Translucent facer when applied for adhesion verification
- Seals around nails, staples and uneven surfaces
- Chemically compatible with most standard sealants including Andersen Sealant
- Available in 3 sizes:
 - 4" x 33'
 - 4" x 75'
 - 6" x 75'
- Purchase a single roll or a case – quantity of 12

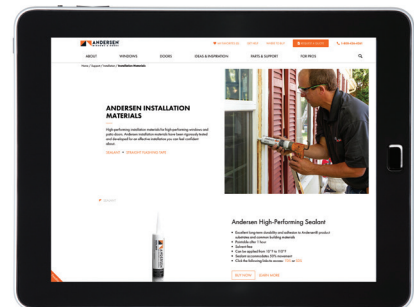

For more information, visit
andersenwindows.com/installmaterials