

MEASURING GUIDE FOR DOUBLE STORM DOORS


1 CHECK TO ENSURE DOOR OPENING AND TRIM ALLOW ENOUGH SPACE FOR A STORM DOOR

DIMENSION A: Minimum $\frac{3}{4}$ " width flat trim surface required


DIMENSION B: Minimum 1" trim (brickmould) depth required

DIMENSION C: Minimum of $2\frac{1}{2}$ " door frame (jamb) depth required*

* Note: Depending on the depth and location of your entry door handle set, additional clearance may be needed.

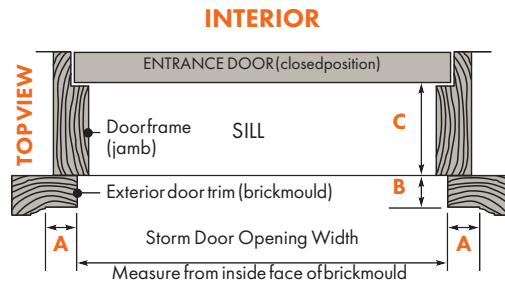

EXTERIOR

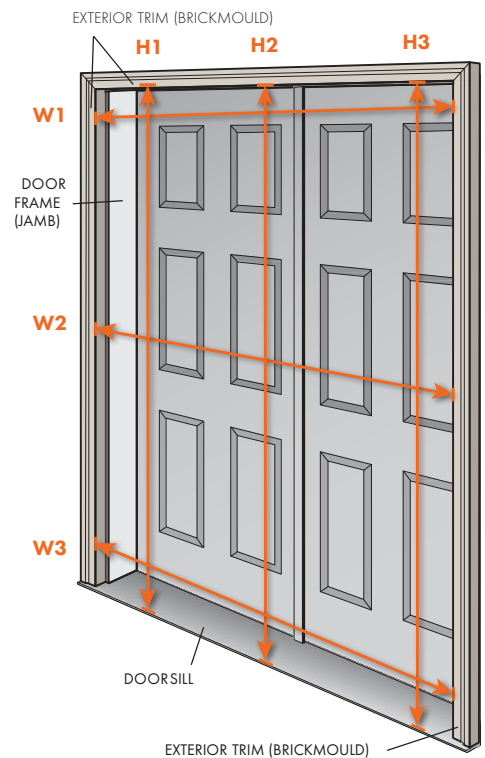

2 MEASURE DOOR OPENING IN ORDER TO DETERMINE THE SIZE STORM DOOR YOU NEED

Measure the width of the door opening at the inside face of exterior trim on each side at top, center & bottom and record the shortest measurement. (see measure points W1, W2 & W3 in the illustration)

RECORD YOUR SHORTEST WIDTH MEASUREMENT:

W:

Measure for the height from the sill to the under-side of the brickmould at the top at the center of the opening and towards each side. (see measure points H1, H2 & H3 in the illustration)

RECORD YOUR SHORTEST HEIGHT MEASUREMENT:

H:

3 DETERMINE THE SIZE YOU NEED BASED ON THE DOOR OPENING MEASUREMENTS AND THE STORM DOOR MODEL THAT IS SELECTED

STANDARD DOOR SIZE WIDTH RANGES:

Two 30" Two 32" Two 33" Two 34" Two 36"

Andersen 4000 & 3000 Series Storm Doors with 45 Minute Easy Install System	59 7/8" TO 60 3/8"	63 7/8" TO 64 3/8"	65 7/8" TO 66 3/8"	67 7/8" TO 68 3/8"	71 7/8" TO 72 3/8"
--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Andersen 2500 & 2000 Series and EMCO Storm Doors	59 3/4" TO 60 3/8"	63 3/4" TO 64 3/8"	65 3/4" TO 66 3/8"	67 3/4" TO 68 3/8"	71 3/4" TO 72 3/8"
--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

STANDARD DOOR SIZE HEIGHT RANGES:

80" 84"†

X

80"
TO
80 7/8"

84"
TO
84 7/8"

X

80"
TO
80 7/8"

84"
TO
84 7/8"

† Only available in 32 and 36 inch widths.

If your measurements are outside the standard width or height ranges shown above, you will require a custom sized door.**

	CUSTOM	CUSTOM XL		CUSTOM	CUSTOM XL
Andersen Custom Door Opening WIDTHS:	55 7/8" TO 77 3/8"	55 7/8" TO 84 3/8"	EMCO Custom Door Opening WIDTHS:	55 3/4" TO 77 3/8"	77 7/16" TO 84 3/8"
Andersen Custom Door Opening HEIGHTS:	72" TO 84 7/8"	72" TO 96"	EMCO Custom Door Opening HEIGHTS:	75" TO 84 7/8"	79" TO 91"

** Select storm door models and select options are not available in custom sizes.

For additional measuring and installing tips visit stormdoors.com/measure or text MEASURE to 24587